



型號說明 Model Designation

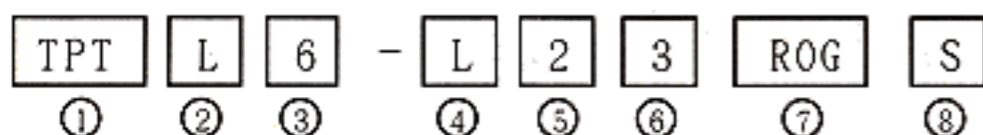

項次 Item	代號 Signal	說明 Description
1 固定方式 Mounting Method	TPT	桿式(Pole Mount)
	TPW	盤式(Tray Mount)
	TPF	可折式(Tented Type)
	TPA	側掛式(Side Hitch Type)
	TPS	桿盤式(Pole With Tray Mount)
2 功能 Functional	L	標準型(Standard Light)
	F	閃光型(Flashing Light)
	S	閃光蜂鳴型(可持續或間歇) Continuous or flashing light with audible alarm
	B	蜂鳴型 Audible alarm light
3 外徑大小 Diameter	4	φ 40mm
	5	φ 50mm
	6	φ 60mm
	7	φ 70mm
4 燈泡總類 Lamp	空白 Space	鎢絲燈泡 Incandescent
	L	LED
5 使用電壓 Voltage	1	110VAC
	2	220VAC
	7	24VAC/DC
	9	12VAC/DC
6 燈數 (Section)	1~5	1~5
7 燈殼顏色 Lens	R	紅(Red)
	O	橙(Orange)
	G	綠(Green)
	B	藍(Blue)
	W	白(White)
8 鋁管長(外露) Aluminum tube length	空白 Space	標準長 (Standard length) TPT: 288mm TPS: 255mm TPF: 43mm
	S	特殊長 (Special length) TPT: 138mm TPS: 94mm TPF: 193mm

燈泡型號說明 Bulb Model Designation

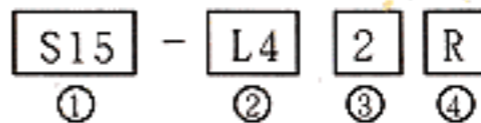

項次 Item	代號 Signal	說明 Description
1 燈座型式 Base Type	S15	BA15S燈泡
2 適用燈殼外徑 Lens Diameter	I4	φ 40mm, 5W Incandescent (鎢絲)
	I5	φ 50mm, 8W Incandescent (鎢絲)
	I6	φ 60mm/φ 70mm, 10W Incandescent
	L4	φ 40mm, LED
	L5	φ 50mm/φ 60mm/φ 70mm, LED
3 電壓 Voltage	1	110VAC
	2	220VAC
	7	24VAC/DC
	9	12VAC/DC
4 顏色 Color	空白(Space)	鎢絲燈泡(Incandescent)
	R	紅(Red)
	O	橙(Orange)
	G	綠(Green)
	B	藍(Blue)
	W	白(White)

燈泡及蜂鳴器額定電流(僅供參考)

Rated current for Bulbs and Buzzers (Reference)

鎢絲燈泡 Incandescent		LED燈泡(LED)	
S15-I49	0.5A	S15-L49 □	0.1A
S15-I47	0.25A	S15-L47 □	0.03A
S15-I41	0.05A	S15-L41 □	0.02A
S15-I42	0.03A	S15-L42 □	0.02A
S15-I59	0.7A	S15-L59 □	0.15A
S15-I57	0.35A	S15-L57 □	0.04A
S15-I51	0.06A	S15-L51 □	0.02A
S15-I52	0.03A	S15-L52 □	0.02A
S15-I69	0.8A	蜂鳴器Buzzer	
S15-I67	0.4A	12V AC/DC	0.08A
S15-I61	0.08A	24V AC/DC	0.02A
S15-I62	0.04A	110V AC	0.01A
		220V AC	0.01A

接線圖 Wiring Diagram

