




。 DIMENSIONS 規格尺寸


TRF-V/TRF-V2

TRF-V/TRF-V2 + PF085A + FH-3x2 UNIT :mm






。 OPERATION 操作方式

TRF-V



TRF-V2

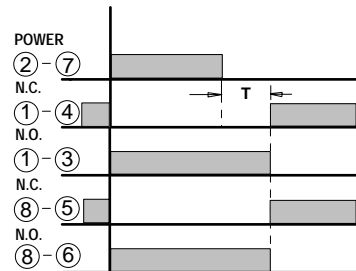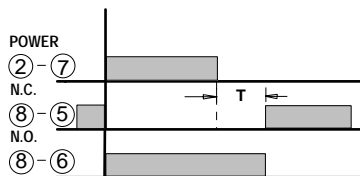

COM. : Common terminal $\overline{\bigcirc} \bigcirc$: Off time out contact
 N.C. : Normally closed contact $\bigcirc \bigcirc$: Instantaneous contact
 N.O. : Normally open contact

- NOTE:
- 。 Set time should be greater than min. operation time.
 - 。 Once power is cut off or timing operation is completed, Power off time is needed to start the operation again.
 - 。 Do not change the set time during operation.
 - 。 When changing set time, cut off power and set the time.