

<h1>STON</h1>	<b>FLICKER RELAY</b>	閃爍繼電器
---------------	----------------------	-------



- CE Approved .
- STON or P&B RELAY inside.
- Using MOTOROLA CMOS IC.
- Can order operation voltage AC or DC .
- CE 認證。
- 內部採用美國第一品牌 P&B 繼電器。
- 使用 MOTOROLA 計時 IC。
- 可選擇操作電壓為交流或直流、經濟實用。
- 超大輸出容量 250V 10A。

◦ **ORDERING INFORMATION 訂購說明**




Timer type 型式	Timer range 時間範圍				Operating voltage 電壓範圍
F : AFK N : SH2-NK Y : SH2-YK	1S	3S	6S	F:10S	D12: DC12V D24: DC24V D48: DC48V A12: AC12V A24: AC24V A110: AC110V A220: AC220V A240: AC240V A380: AC380V A440: AC440V
				N,Y:12S	
	30S	60S	3M	6M	
	F:10M	30M	60M	3H	
	N,Y:12M				

◦ **SPECIFICATIONS & CHARACTERISTICS 規格 & 特性**



Type 型式	AFK/SH2-NK/SH2-YK	
Rate operation voltage 額定電壓	DC:12V/ 24V/ 48V AC:12V/ 24V/ 110V-220V/ 240V/ 380V/ 440V	
Operating voltage range 電壓使用範圍	DC: 85%~110% AC: 80%~110%	
Rated frequency 額定頻率	AC: 50~60Hz	
Rated power consumption 額定功率消耗	About: 2VA	
Rated control capacity 輸出容量	DC: 5A 28VDC AC: 10A 250VAC P.F.=1	
Setting accuracy 設定誤差	± 10%	
Reset time 復歸時間	Less than 0.1s	
Life 壽命	Mechanical 機械	5000000
	Electrical 電氣	100000
Output arrangement 輸出方式	Timed-out 1 form C	
Max. temperature rise 最大溫升	55 deg.	
Ambient temperature 周圍溫度	-10°C to +65°C 但不結冰結露 But no ice	
Ambient humidity 周圍溼度	Max. 85% RH	
Weight 重量	About 170g / N type : About 230g / Y type : About 240g	

## ◦ DIMENSIONS 規格尺寸

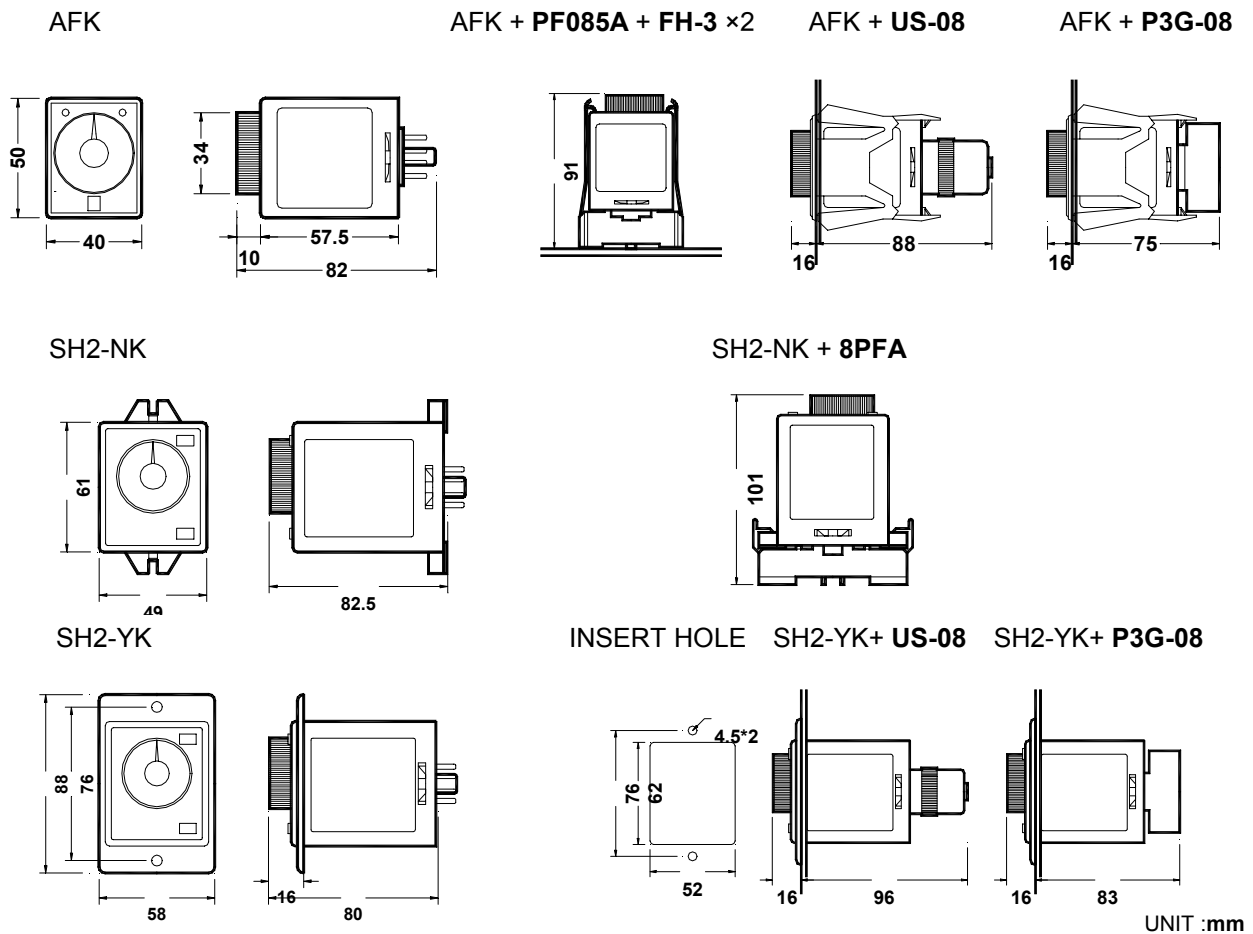

## ◦ OPERATION 操作方式

AFK/SH2-NK/SH2-YK

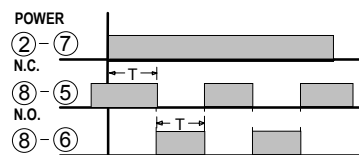

COM. : Common terminal

N.C. : Normally closed contact

N.O. : Normally open contact

● ◊ ● : Flicker out contact

○ ○ : Instantaneous contact

- NOTE:
- Set time should be greater than min. operation time.
  - Once power is cut off or timing operation is completed, Power off time is needed to start the operation again.
  - Do not change the set time during operation.
  - When changing set time, cut off power and set the time.