




# STDV-A□/STDV-B□/STDV-C□/STDV-D□

## 。 DIMENSIONS 規格尺寸

STDV- N





STDV- N + 8PFA




UNIT :mm

STDV- Y





INSERT HOLE STDV- Y + US-08。 STDV- Y + P3G-08

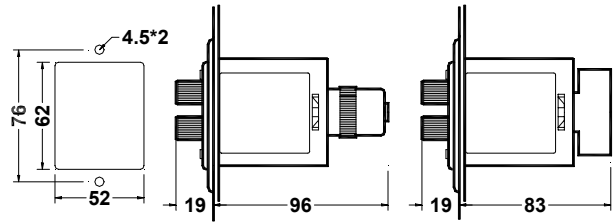

## 。 OPERATION 操作方式

STDV-

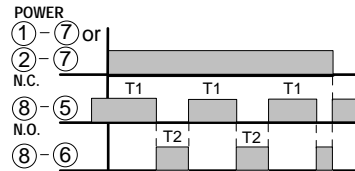

COM. : Common terminal  
 N.C. : Normally closed contact  
 N.O. : Normally open contact  
 : Flicker out contact  
 : Instantaneous contact

- NOTE:
- 。 Set time should be greater than min. operation time.
  - 。 Once power is cut off or timing operation is completed, Power off time is needed to start the operation again.
  - 。 Do not change the set time during operation.
  - 。 When changing set time, cut off power and set the time.