

Printview: COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-415

**WAGO**® online catalog / eShop

**COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C**

Item No.: 221-415



COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C

### Marking

RoHS ✓  
Compliant

### Business data

|                      |               |
|----------------------|---------------|
| Supplier             | WAGO          |
| Item no.             | 221-415       |
| GTIN / EAN           | 4055143234658 |
| Content              | 1             |
| Order amount         | 25            |
| Customer item number |               |

### Notes

### Technical data

#### Miscellaneous


|                                   |             |
|-----------------------------------|-------------|
| Total number of connection points | 5           |
| Total number of potentials        | 1           |
| Color                             | transparent |
| Ratings according to 1            | EN 60664    |
| Pollution degree (1)              | 2           |
| Rated voltage EN (1) [V]          | 450 [V]     |
| Rated surge voltage (1) [kV]      | 4 [kV]      |
| Nominal current [A]               | 32 [A]      |

| <b>Technical data</b>                |  |
|--------------------------------------|--|
| <i>Connection technology (1)</i>     | <i>CAGE CLAMP®</i>                               |
| <i>Nominal cross section 1</i>       | <i>4 mm<sup>2</sup></i>                          |
| <i>Solid sizes 1</i>                 | <i>0.2 ... 4 mm<sup>2</sup> / 24 ... 12 AWG</i>  |
| <i>stranded, connectable 1</i>       | <i>0.2 ... 4 mm<sup>2</sup> / 24 ... 12 AWG</i>  |
| <i>Fine-stranded wires 1</i>         | <i>0.14 ... 4 mm<sup>2</sup> / 24 ... 12 AWG</i> |
| <i>Strip length 1</i>                | <i>11 mm / 0.43 in</i>                           |
| <i>Type of wiring</i>                | <i>Side-entry wiring</i>                         |
| <i>Flammability rating per UL 94</i> | <i>V2</i>  |
| <i>Weight [g]</i>                    | <i>4.048 [g]</i>                                 |
| <i>Width</i>                         | <i>29.9 mm / 1.177 in</i>                        |
| <i>Height</i>                        | <i>8.3 mm / 0.327 in</i>                         |
| <i>Length</i>                        | <i>18.6 mm / 0.732 in</i>                        |
| <i>Safety information 1</i>          | <i>In grounded power lines</i>                   |

Printview: COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-415

## Images & drawings



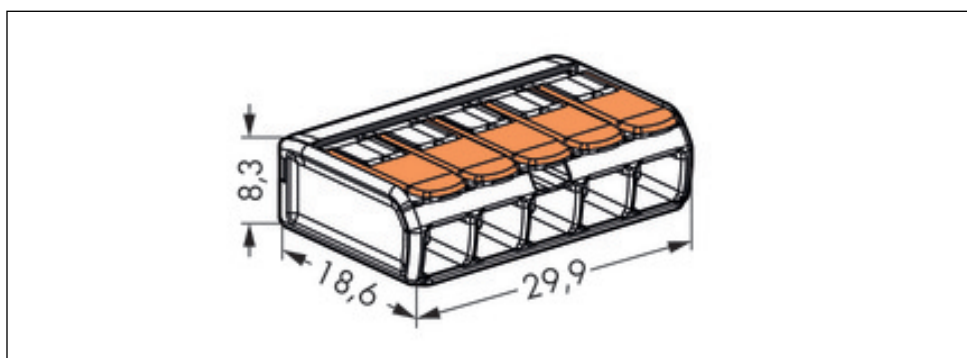

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.