




2773 Series

No Nuts like WALL-NUTS®

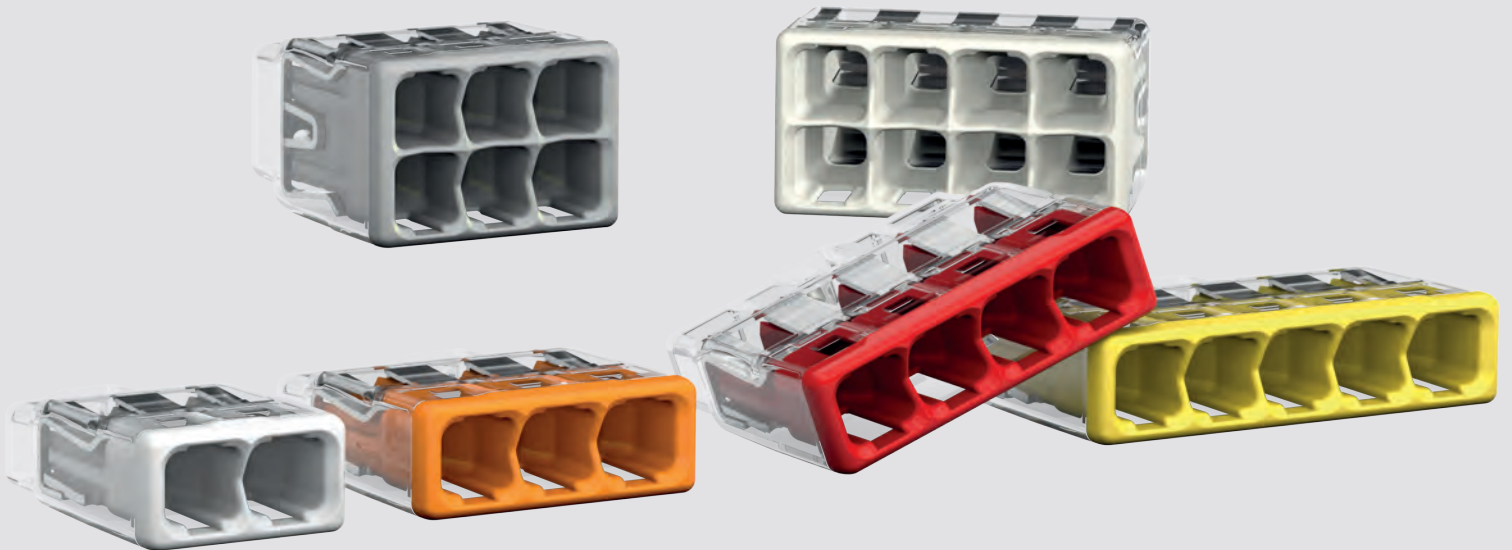


WAGO WALL-NUT® Connectors for Solid and Stranded Conductors (2773 Series)

Push your way to fast, reliable connections – no twisting required. It's never been easier than with WAGO 2773 push wire connectors. The compact, clear choice for any splicing job.

Your Advantages

- Safety of the contact due to low insertion forces and high retention forces
- Large connection area and different conductor types can be combined in a small housing
- Clear transparent housing for checking the conductor position and correct stripping length

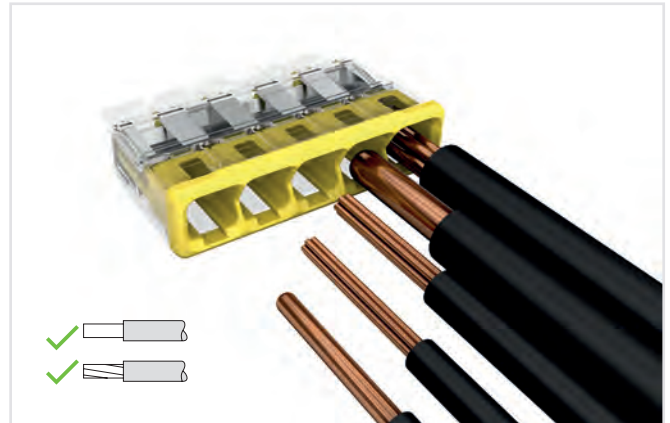

Strip solid or stranded conductor to 13 mm (0.51 inch).



Termination: Insert the stripped conductor until it hits the backstop.



The transparent housing shows if conductors are fully inserted; within the colored base, a clear port shows if the conductor's strip length is correct. Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Picture shows center conductor with exceeded strip length.




Removal:
Hold solid conductor to be removed and twist alternately left and right while pulling the connector. Stranded wire: simply cut the wire close to the connector entry, strip it and insert into a new connector.



Testing via test port opposite to conductor entry.



The mounting carrier also allows the connectors to be mounted on DIN-rails and used in control cabinets.

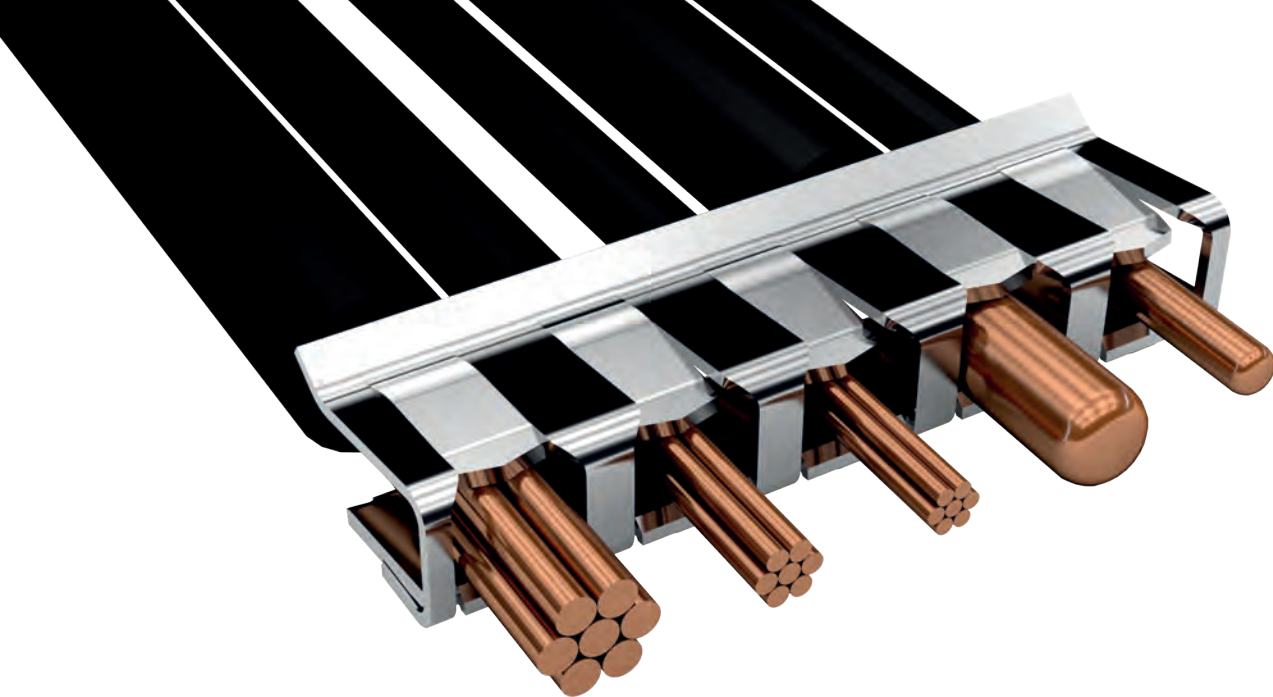

For Solid and Stranded Conductors – With 6 Models Always The Right Connector

2773 Series


20 ... 12 AWG Cu



600 V (1000 V signs and fixtures)

Continuous service temperature:








18 ... 12 AWG Cu ≤ 7 str.



20 A

105 °C / 221 F

16 ... 12 AWG Cu ≤ 19 str.

	Description	Item No.	Pack. Unit
	2-wire connector	2773-402	120
	3-wire connector	2773-403	100
	4-wire connector	2773-404	80
	5-wire connector	2773-405	60
	6-wire connector	2773-406	50
	8-wire connector	2773-408	40
	Mounting carrier for single- and double-row connectors	2773-500	10



WAGO Kontakttechnik GmbH & Co. KG

Postfach 2880 · 32385 Minden
Hansastraße 27 · 32423 Minden

info@wago.com
www.wago.com

Headquarters	+49 571/887 - 0
Sales	+49 571/887 - 222
Orders	+49 571/887 - 44 333
Fax	+49 571/887 - 844 169

WAGO is a registered trademark of WAGO Verwaltungsgesellschaft mbH.

"Copyright – WAGO Kontakttechnik GmbH & Co. KG – All rights reserved. The content and structure of the WAGO websites, catalogs, videos and other WAGO media are subject to copyright. Distribution or modification of the contents of these pages and videos is prohibited. Furthermore, the content may neither be copied nor made available to third parties for commercial purposes. Also subject to copyright are the images and videos that were made available to WAGO Kontakttechnik GmbH & Co. KG by third parties."